

## Neural networks as econometric tool

Johan F. Kaashoek ([kaashoek@few.eur.nl](mailto:kaashoek@few.eur.nl))

*Econometric Institute, Erasmus University Rotterdam, The Netherlands*

Herman K. van Dijk ([hkvdijk@few.eur.nl](mailto:hkvdijk@few.eur.nl))

*Econometric Institute, Erasmus University Rotterdam, The Netherlands and  
Faculty of Economics and Politics, University of Cambridge, UK*

**Abstract.** The flexibility of neural networks to handle complex data patterns of economic variables is well known. In this survey we present a brief introduction to a neural network and focus on two aspects of its flexibility. First, a neural network is used to recover the dynamic properties of a nonlinear system, in particular, its stability by making use of the Lyapunov exponent. Second, a two-stage network is introduced where the usual nonlinear model is combined with time transitions, which may be handled by neural networks. The connection with time-varying smooth transition models is indicated. The procedures are illustrated using three examples: a structurally unstable chaotic model, nonlinear trends in real exchange rates and a time-varying Phillips curve using US data from 1960-1997.

### 1. Introduction

In recent decades one witnesses a substantial increase in the interest of econometricians for nonlinear models and methods. This is due to: (i) advances in processing power of personal computers; (ii) increased and successful research on algorithms for fast numerical optimization methods; and (iii) the availability of large data sets. One of the nonlinear models which received much attention from applied researchers is a neural network, also known as neural net. The basic idea behind a neural net is the tremendous data-processing capability of the human brain. Human brains consist of an enormous number of cells, labeled neurons. These neurons are connected and signals are transmitted from one cell to another cell through the connections. These connections are, however, not all equally strong. When a signal is transmitted through a strong connection it arrives more strongly in the receiving neuron. One may argue that there is a particular weight associated with each

connection which varies with the strength of the connection. Neurons may also receive signals from outside the brains. These are then transformed within the brains and returned to the outside world. The whole structure of signal-processing between many (unobserved) cells can be described by a particular mathematical model which is therefore known as an *artificial* neural network model. For convenience we delete, henceforth, the qualification *artificial*. A more detailed description of the analogy between the mathematical neural network models and the working of the human brain is given by, e.g., Simpson (1990).

Neural networks are used in many sciences like biology, informatics, and economet(etr)ics. Within the latter field neural nets are, in particular, applied for the description and prediction of complex data patterns in economic time series. The field is very extensive and empirical illustrations are many. This paper is not intended to give a complete survey. Instead, we start with a brief introduction on neural nets and their flexibility. Our focus is on the following two applications of neural network analysis with the aim of showing that neural nets are a convenient econometric tool:

- (i) Recovery of the unobserved dynamics, in particular, stability of a nonlinear system from a low dimensional data set;
- (ii) Specification of a neural network where a time varying component is included.

In the first topic a neural net is used to recover the dynamic properties of a nonlinear system, in particular, its stability by making use of the Lyapunov exponent. We use one simulated series from a structurally unstable chaotic model and some data from real exchange rates to illustrate the methods. Second, a two-stage network is introduced where the usual nonlinear model is combined with time transitions which may be handled by neural nets. The connection with time-varying smooth transitions models is indicated. The procedures are illustrated on a time-varying Philips curve using US data from 1960-1997. We discuss connections with the existing literature but refer for a general introduction to neural networks to Hertz, Krogh and Palmer (1991) and Bishop (1995) and the references cited there.

## 2. A simple introduction to neural networks

There exist many classes of neural networks, see e.g. Hertz, Krogh and Palmer (1991) and Bishop (1995). In this paper we restrict attention to a simple class which is known as the three-layer feed forward neural network, also labeled the Rumelhart-Hinton-Williams multi-layer network

after Rumelhart et al. (1986). For expository purpose we describe and interpret this network as a generalization of the well known linear model from basic econometrics, see e.g. Theil (1971), chapter 3. Suppose that the cells of the network are partitioned into particular groups or layers and suppose further that there exist three such layers: the 'input' layer, the 'hidden' layer, and the 'output layer'. The cells of the input layer correspond to the 'regressors' or 'explanatory variables' in the standard linear regression model. The cells in the output layer correspond to the dependent variables in the linear model. The hidden layer contains cells which transmit the signals from the input layer to the output layer. These cells may be interpreted as unobserved components built into the linear model. A graph of a neural network with three cells in the input layer, two cells in the hidden layer and two cells in the output layer is shown in figure (1).

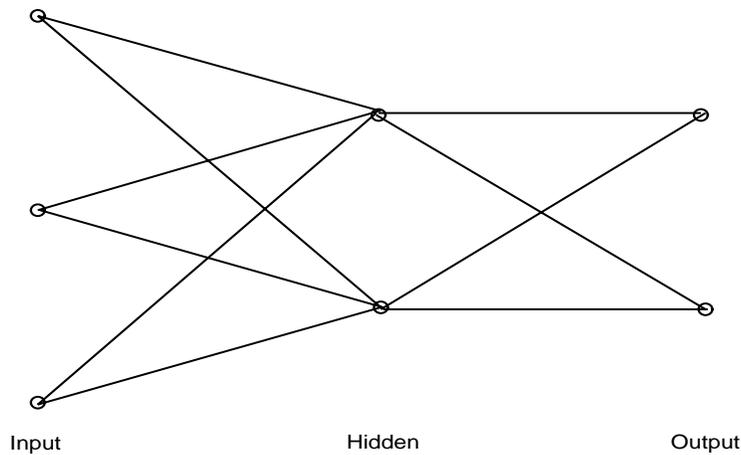


Figure 1. Graph of a neural network

The network transmit signals as follows. A weighted sum of the signals of the input cells are sent to the hidden layer cells. Within the cells of this layer the values of the signals received are transformed by a so-called 'activation function'. A weighted sum of the transformed signals is then sent to the cells of the output layer. We note that the weights in the neural network correspond to unknown parameters in the linear model.

Henceforth, we make use of the following (standard) notation. A neural network with  $I$  cells in the input layer,  $H$  cells in the hidden Layer and  $O$  cells in the output layer is denoted as  $nn(I, H, O)$ . In figure (1) the network is given as  $nn(3, 2, 2)$ .

Next, we discuss the mathematical structure of a neural net. We make use of the following notation for cells, signals and weights:

$i$	index of input cells, $i = 1, \dots, I$
$h$	index of hidden layer cells, $h = 1, \dots, H$
$j$	index of output cells, $j = 1, \dots, O$
$g(\cdot)$	activation function
$x_i$	value of input cell $i$
$y_j$	value of output cell $j$
$a_{ih}$	weight of the signal from input cell $i$ to hidden cell $h$
$b_h$	constant input weight for hidden cell $h$
$c_{jh}$	weight of the signal from hidden cell $h$ to output cell $j$
$d_j$	constant weight for output cell $j$

The value of the signal that arrives in hidden cell  $h$  is given as

$$\text{input for hidden cell } h = \sum_{i=1}^I (a_{ih} x_i) + b_h \quad (1)$$

Hidden cell  $h$  transforms the value of this signal with the activation function  $g(\cdot)$  as follows

$$\text{output from hidden cell } h = g\left(\sum_{i=1}^I (a_{ih} x_i) + b_h\right) \quad (2)$$

where the activation function is a monotonous increasing and bounded function given as

$$g(x) = \frac{1}{1 + e^{-x}} \quad (3)$$

which is the well known logistic function, defined on the interval  $[0, 1]$ . A particular value of the logistic function indicates the extent to which a hidden cell is activated. The logistic function has attractive properties such as that the derivative is equal to  $g(x)(1 - g(x))$ . The graph of the function is given in figure (2).

Other choices of the activation function are other monotone squashing functions as the *arctan* and *tanh* functions and the *cosine* squashing function, see e.g. Hertz, Krogh and Palmer (1991).

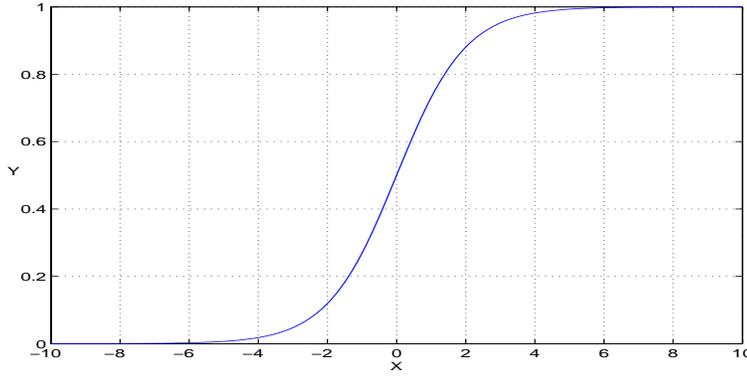


Figure 2. Graph of logistic activation function

Next, the value  $y_j$  of the output cell  $j$  is given as the weighted sum of the output of the hidden cells. It is equal to

$$y_j = \sum_{h=1}^H c_{jh} g \left( \sum_{i=1}^I a_{ih} x_i + b_h \right) + d_j \quad (4)$$

In matrix notation one can write:

$$y = C\mathcal{H} + d \quad (5)$$

$$\mathcal{H} = G(xA + b) \quad (6)$$

where

$$x \in \mathbb{R}^I$$

$$A = (a_{ih}), I \times H \text{ matrix}$$

$$\mathcal{H} = (h_1, \dots, h_H), \text{ the vector of hidden cells outputs}$$

$$G: \mathbb{R}^H \rightarrow \mathbb{R}^H \text{ is the vector function, given by}$$

$$G(v) = [g(v_1), \dots, g(v_H)]'$$

$$C = (c_{jh}), O \times H \text{ matrix}$$

$$y \in \mathbb{R}^O$$

$$b \in \mathbb{R}^H$$

$$d \in \mathbb{R}^O$$

The neural network  $nn(\cdot)$  describes the situation at one moment in time and it indicates a deterministic relation. By adding a subscript  $t$  and an error term  $\epsilon$  one obtains the system

$$\begin{aligned} y_t &= C\mathcal{H}_t + d + \epsilon_t \\ \mathcal{H}_t &= G(x_t A + b) \end{aligned} \quad (7)$$

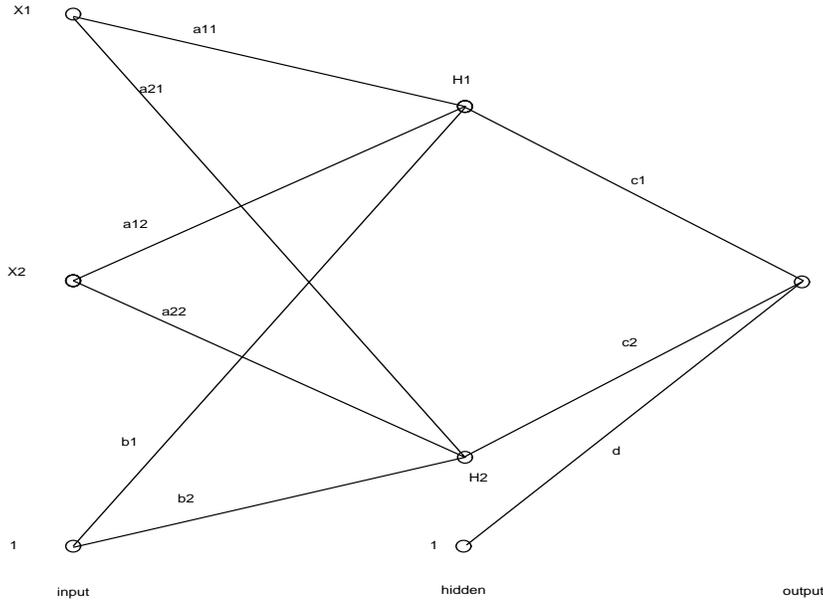


Figure 3. Graph of a neural network

Figure (3) is a representation of an  $nn(3, 2, 1)$ . The mathematical specification of this model is equal to

$$y_t = d + \frac{c_1}{1 + e^{-a_{11}y_{t-1} - a_{12}y_{t-2} - b_1}} + \frac{c_2}{1 + e^{-a_{21}y_{t-1} - a_{22}y_{t-2} - b_2}} \quad (8)$$

We note that this model is closely related to a threshold autoregressive model; for details see Granger and Teräsvirta (1993) and Van Dijk (1999).

### 2.1. FLEXIBILITY OF NEURAL NETWORKS

The flexibility of three layer feed forward neural nets is well documented. It is summarized by its so-called 'universal approximation' property. Most of this approximation theory starts with Kolmogorov's representation theorem, see Kolmogorov (1957). This provides the background for the Hecht-Nielsen article in 1987, see Hecht-Nielsen (1987). From the point of view of a neural network user, the Kolmogorov theorem provides, however, a justification for the existence of approximations in the reverse way. That is to say, the number of layers and cells are given but not the functional form of the one-dimensional activation functions. In a neural network one encounters the opposite case: the activation functions  $g$  are given (to some extent) but, at least, the number of hidden layer cells is unknown.

The articles of Gallant and White (1989) (with the revealing title: "There exists a neural network that does not make avoidable mistakes", Hecht-Nielsen (1989), Cybenko (1989), Funahashi (1989) and Hornik, Stinchcombe and White (1989) provides the theoretical background for the statement :

*A (three layer) feed forward network is an universal approximator.*

This general statement should be interpreted in the sense that any square integrable function can be approximated arbitrary close in  $L_2$  norm.

Further, the articles of Hornik, Stinchcombe and White (1990) and Gallant and White (1992) extend the approximation capabilities of the network to the derivative of a function.

## 2.2. ESTIMATION OF PARAMETERS OF NEURAL NETWORKS

An generally accepted optimization principle is to minimize the norm of

$$\min_{\theta} \sum_t \|y_t - \hat{y}_t(\theta)\|^2 \quad (9)$$

where  $\|\cdot\|$  is the Euclidean norm. For the case of a neural net it follows that one minimizes the criterion function

$$\min_{A,b,C,d} \sum_t \|y_t - CG(x_t A + b) - d\|^2 \quad (10)$$

A well known method for numerical optimization is the simplex method and the BFGS method, a gradient method; see Press et al. (1988).

Initial values for the parameters  $A$ ,  $b$ ,  $C$  and  $d$  are chosen randomly from the uniform distribution on  $[-0.5, 0.5]$ . We emphasize that the logistic function is insensitive for large and small values. Therefore, one should scale down the range of data before processing the data through the network. Since the output range of a hidden cell lies between 0 and 1, an appropriate range for the data should be  $[0.1, 0.9]$ .

## 2.3. DETERMINING THE SIZE OF A NEURAL NETWORK

Neural nets are flexible, but the price of increased flexibility is the danger of 'overfitting'. This statement may be explained as follows.

In empirical econometric models one assumes that an observed economic time series consists of a part that can be explained and a part that is labeled unexplained or 'residual noise'. With 'overfitting' this noise is also 'fitted'. Then one obtains a wrong picture of the real data generating process and the quality of the forecasts may be badly affected. 'Overfitting' with neural nets may occur by increasing the number of hidden cells, which increases the number of parameters, without increasing the number of explanatory variables or inputs. Because of this possibility neural nets are more sensitive to 'overfitting' than other classes of models like autoregressive models. Therefore it is important to develop methods that determine the optimal size of a neural net. Pruning methods apply to the reduction of large neural networks to smaller ones. Two methods can be distinguished: weight (inter-connection) reduction or node reduction. Examples can be found in Hertz, Krogh and Palmer (1991) and Bishop (1995); see also Mozer and Smolensky (1989).

Below we summarize in short a descriptive method to reduce the size of a neural net. Descriptive methods are useful for exploratory data analysis. This type of analysis is more and more needed since in recent decades large data sets for economic variables become available. In these data complex patterns of the economic variables may occur. For more details we refer to Kaashoek and van Dijk (1998).

### 2.3.1. *Pruning a network: the incremental contribution method*

The method we follow is labeled 'incremental contribution method'. It looks for each cell separately how much the specific cell contributes to the overall performance of the network. When this contribution is considered to be low then such a cell is a candidate for excluding from the existing network (and all its connections). Re-estimating the reduced network may confirm this exclusion. To measure the contribution of a cell we look at two quantities.

First, the square of the correlation coefficient  $R^2$  between  $y$  and  $\hat{y}$ , the neural network output where

$$R^2 = \frac{(\hat{y}'y)^2}{(y'y)(\hat{y}'\hat{y})} \quad (11)$$

where  $y$  as well  $\hat{y}$  are taken in deviation of the means.

The procedure applies to hidden layer cells as well as to input layer cells, but here we restrict ourselves to hidden layer cells.

The contribution of cell  $h$  can now be measured by leaving out cell  $h$ , and its connection from the network, and again calculate the square of the correlation coefficient; we denote network estimates with cell  $h$  left

out by  $\hat{y}_{-h}$ , and the corresponding  $r^2$  is defined as:

$$R_{-h}^2 = \frac{(\hat{y}'_{-h}y)^2}{(y'y)(\hat{y}'_{-h}\hat{y}_{-h})}. \quad (12)$$

The incremental contribution  $R_{incr}^2(i)$  is now given as

$$R_{incr}^2(h) = R^2 - R_{-h}^2. \quad (13)$$

In the group of hidden layer cells, cells with a low  $R_{incr}^2$  are candidates for exclusion.

The second quantity involves the idea of principal components, see Theil (1971). Let again  $\hat{y}_h$  be the network output with exclusion hidden layer cell  $h$ . Construct the vector  $e_{-h}$  of residuals

$$e_{-h} = y - \hat{y}_{-h} \quad (14)$$

and the matrix  $E_{-H}$ :

$$E_{-H} = (e_{-1}, \dots, e_{-h}). \quad (15)$$

The matrix  $E_{-H}'E_{-H}/T$  is an estimate of the covariance matrix of the  $e_{-h}$ 's. The principal component of  $E_{-H}'E_{-H}$  is the eigenvector at maximal eigenvalue in absolute sense. Hence the principal components provides a linear combination of  $(e_{-1}, \dots, e_{-h})$  which explains the largest part of the variance.

Which fraction is explained by each of the eigenvectors is given by the relative weight  $w_i$  with

$$w_h = \frac{\lambda_h}{\sum_{h=1}^H \lambda_h} \quad (16)$$

where  $\lambda_h$  are the eigenvalues of  $E_{-H}'E_{-H}$ . In case of the principal component  $\lambda_h$  is the largest eigenvalue.

Now one can look at the components of the principal component itself: cells with low incremental contribution will have a low (in absolute sense) coefficient in the eigenvector composing the principal component. The exclusion of those cells will cause a relatively small increase in the residuals; these cells are again candidate for exclusion.

Finally, one may apply a graphical analysis. Assuming the graph of  $\hat{y}$  fits well with the graph of  $y$ , the graph of  $\hat{y}_{-h}$  may differ less from the graph of  $y$  for those cells with a "low contribution".

The procedure involves the contributions of one cell only. It is a "feature" of neural networks that sometimes pair of cells do have a similar contribution with the output of the cells having reverse sign. Such a "behaviour" can be detected by graphical analysis and by observing that in the principal component analysis, explained above, such type of cells do have (almost) equal coefficients. In that case one has to look at the incremental contribution of both cells together.

We end this section with a remark on the descriptive nature of our procedure. As stated before, large data sets have become available in the economic sciences. Important examples are data sets on household behaviour and labour employment at the individual level. Further, data sets on financial variables in the stock- and exchange rate markets. This appears only a beginning. The new scanner-data in marketing constitute great and fascinating challenges in data analysis. Because its flexibility, we believe that 'pruned' neural networks may be a useful instrument for exploratory data analysis in order to find possibly complex patterns of economic variables.

Our method is descriptive and as such has the same limitations as all techniques of data summarizations like the construction of histograms and/or the plotting of time series together with a list of summary statistics. However, using neural networks one can perform a dynamic analysis and compute the long run properties; see next section. For a statistical approach to neural network analysis in econometrics, we refer to White (2000).

### 3. Stability analysis of complex nonlinear systems

A linear autoregressive system of equations of the  $n$ -vector of variables  $x(t)$  can be written as

$$x_{t+1} = Ax_t, x_t \in \mathbb{R}^N, \quad (17)$$

The stability of fixed or equilibrium points depends on the eigenvalues  $\lambda$  (real or complex) of the matrix  $A$ . Taking the absolute value or modulus of the eigenvalues,  $\|\lambda\|$ , the fixed point will be unstable if for some eigenvalue  $\lambda$ ,  $\|\lambda\| > 1$  which is equivalent with  $\ln \|\lambda\| > 0$ . The same holds for the stability of orbits or time series  $x_0, \dots, x_{T-1}, \dots$ . Note that in a point  $x_t \in \mathbb{R}^N$ , the logarithm of the local expansion rate in the direction of a vector  $v \in \mathbb{R}^N$  is given as

$$\ln \left\| A \frac{v}{\|v\|} \right\| \quad (18)$$

Lyapunov exponents are a generalization of the above concept for non-linear systems. They are defined as the (spatial or time) means of the logarithm of local expansion rates. In the case of time means, the expansion rates are calculated in the time series  $x_0, \dots, x_{T-1}, \dots$  where in a point  $x_t \in \mathbb{R}^N$ , the logarithm of the local expansion rate in the direction of a vector  $v \in \mathbb{R}^N$  is now given as

$$\ln \|D_x F(x_t) \frac{v}{\|v\|}\| \quad (19)$$

where  $F : \mathbb{R}^N \rightarrow \mathbb{R}^N$  is the data generating function:

$$x_{t+1} = F(x_t) \quad (20)$$

and  $D_x F$  is the jacobian. Then the Lyapunov exponent  $\lambda_{v_0}$ , with start direction vector  $v_0$  and start value  $x_0$ , is defined as

$$\lambda_{v_0} = \lim_{T \rightarrow \infty} \frac{1}{T} \sum_{t=1}^T \ln \|D_x F(x_{t-1}) \frac{v_{t-1}}{\|v_{t-1}\|}\| \quad (21)$$

$$v_t = D_x F(x_{t-1}) v_{t-1}, \|v_0\| = 1. \quad (22)$$

The dependence of  $\lambda$  on  $v_0$  and on  $x_0$  seems to indicate an infinite number of Lyapunov exponents. However, this is not the case. In general there are as much Lyapunov exponents as the dimension  $N$  of the system; see Guckenheimer and Holmes (1983). Above all, for an ergodic system, with the space-mean being equal to time-mean, it follows that for almost all start directions  $v_0$ , and for almost all initial values  $x_0$ , the value of  $\lambda_{v_0}$  will be the largest Lyapunov exponent; see Arnold and Avez (1988) and Guckenheimer and Holmes (1983).

Since the mean of logarithms is the logarithm of the geometric mean, one can also write

$$\lambda_{v_0} = \lim_{T \rightarrow \infty} \frac{1}{T} \ln \prod_{t=1}^T \|D_x F(x_{t-1}) \frac{v_{t-1}}{\|v_{t-1}\|}\| \quad (23)$$

$$= \lim_{T \rightarrow \infty} \frac{1}{T} \ln \|D_x F^T(x_0) v_0\| \quad (24)$$

If some (or all) of the Lyapunov exponents are positive then one has so-called "sensitivity on initial values", a characteristic of chaotic series. Hence, especially, the largest Lyapunov exponent is of interest: if positive, then the series is unstable, if negative then the series is stable.

This result can directly be applied if  $F$ , the data generating function is known. However, in practice, one observes only a one dimensional, finite time series  $\{x_t, t = 0, \dots, T-1\}$ . So the question is how to extract from the series  $\{x_t\}$  the dynamic properties, especially the value of the largest Lyapunov exponent of the original (unknown) model (20).

Although only the series  $x_t$  is given, one can use the embedding theorem by Takens (Takens, 1981), to reconstruct from the one-dimensional series  $x_t$  the original deterministic and smooth model. This theorem says that if the data  $x_t$  has an *deterministic explanation*, which means the data generating process is smooth and deterministic, there exists a finite embedding  $m$ , such that the dynamic system  $\Psi : \mathbb{R}^m \rightarrow \mathbb{R}^m$  given by

$$\Psi : (x_t, x_{t-1}, \dots, x_{t-m+1}) \rightarrow (x_{t+1}, x_t, \dots, x_{t-m+2}) \quad (25)$$

has the same dynamical properties as the original one. Moreover, if the original system is  $N$ -dimensional then an embedding dimension  $m = 2N + 1$  will be sufficient to have "  $\Psi$  reconstruct the original system".

Note that the only unknown component of  $\Psi$  is the first component function  $\Psi_1 : \mathbb{R}^m \rightarrow \mathbb{R}$  with

$$\Psi_1 : (x_t, x_{t-1}, \dots, x_{t-m+1}) \rightarrow x_{t+1}. \quad (26)$$

For the other components,  $i > 1$ , yields  $\Psi_i(x_t, x_{t-1}, \dots, x_{t-m+1}) = x_{t-i+2}$ .

This function  $\Psi_1$  should be approximated, and a neural network seems to be a proper candidate to do the job because its "universal approximation" property.

Once  $\Psi$  is found, the Lyapunov exponents can be calculated using equation (23). This means the calculation of  $D_x \Psi$  in each point of the time series  $(x_t, x_{t-1}, \dots, x_{t-m+1})$ . Note that  $D_x \Psi$  has the form of a companion matrix. However, to avoid overflow in calculating the product of  $D_x \Psi$ 's the more stable method of Eckmann-Ruelle is used. In this case, a  $QR$  decomposition of  $D_x \Psi$  is calculated at each point and the Lyapunov exponents are now simply the products of diagonal elements of the matrices  $R$ ; see Eckmann and Ruelle (1985).

We apply this procedure to two data sets, one simulated and one economic time series.

### 3.1. SIMULATED DATA EXPERIMENT

In this experiment we use simulated data. The data are generated by the model

$$\begin{aligned}x_{t+1} &= \alpha x_t + \epsilon_t - 0.5 \\ \epsilon_{t+1} &= \gamma \epsilon_t (1 - \epsilon_t),\end{aligned}\tag{27}$$

where only the series  $x_t$  is observed. The data, called *CH95*, are generated with  $\alpha = 0.95$  and  $\gamma = 4$ . Although completely deterministic, this model has some nice features:

- The series  $\epsilon_t$  is chaotic: for initial values in  $[0, 1]$ , the series  $\epsilon_t$  is bounded between 0 and 1 but has the "sensitivity of initial values" property characteristic for chaotic series.
- The model is structural unstable ( $\gamma = 4$ ); e.g. a small change in the coefficient value 4, will cause a dynamical different data series. For instance, a  $\gamma$  value greater than 4 will for almost all initial values (between 0 and 1) generate diverging (exploding) data  $\epsilon_t$ ; for values less than 4, periodic data are possible: the system is *structural* unstable.

Suppose only the one dimensional data set  $x_t$  is observed. Our goal should be to extract from this series, the dynamical properties of the original data generating process: only Lyapunov exponents are considered.

Note that model equation (27) is equivalent with a second order non-linear difference equation in  $x_t$ :

$$x_{t+2} = \alpha x_{t+1} + \gamma(x_{t+1} - \alpha x_t + 0.5)(1 - x_{t+1} + \alpha x_t - 0.5)\tag{28}$$

where the right hand side is a (non-linear) *continuous* function in  $(x_{t+1}, x_t)$ . So this case is well suited for a neural network approximation. Moreover, since the neural network is intrinsically non-linear, the chaotic aspect of the data could be grasped by such an approximation while a simple linear autoregressive model would certainly fail as an 'accurate' approximation.

The original data generating model (27) has two Lyapunov exponents which can be calculated analytically. In a point  $(x_i, \epsilon_i)$ , the jacobian of the system function  $F$  is given by

$$\begin{pmatrix} 0.95 & 1 \\ 0 & 4(1 - \epsilon_i) \end{pmatrix}\tag{29}$$

Since the jacobian  $D_x F^T(x_0, \epsilon_0) = \prod_{t=1}^T D_x F(x_{t-1}, \epsilon_{t-1})$ , one has

$$D_x F^T(x_0, \epsilon_0) = \begin{pmatrix} 0.95^T & a_{12} \\ 0 & a_{22}(T) \end{pmatrix} \quad (30)$$

where  $a_{22}(T) = \prod_{t=1}^T 4(1 - \epsilon_{t-1})$ . It is obvious that  $D_x F^T$  has two eigenvalues, e.a.  $0.95^T$  and  $a_{22}(T)$ . With  $v_0 = (1, 0)$ ,  $D_x F^T(x_0, \epsilon_0)v_0 = ((0.95)^T, 0)$  which results in a Lyapunov exponent value of  $\ln(0.95)$ .

It is well known that the system  $\epsilon_t = 4\epsilon_{t-1}(1 - \epsilon_{t-1})$  has Lyapunov exponent  $\ln(2)$ . Since  $\ln(2) > \ln(0.95)$ , for any start vector  $v_0 \neq (1, 0)$ , the resulting Lyapunov exponent will be  $\ln(2)$ .

Writing both Lyapunov exponents in base 2 logarithm, the values will be  $\ln(0.95)/\ln(2) \sim 0.074$  and 1.

Before starting with the neural network computations of the function  $\Psi_1$ , see equation (26), first the scatter diagram  $\{(x_{t-1}, x_t)\}$  of the series *CH95* is given. The sample size  $T$  is 200. Since  $e_t$  is bounded between 0 and 1, the graph of  $(x_{t-1}, x_t)$  lies between the lines  $y = 0.95x + 0.5$  and  $y = 0.95x - 0.5$ . see figure (4).

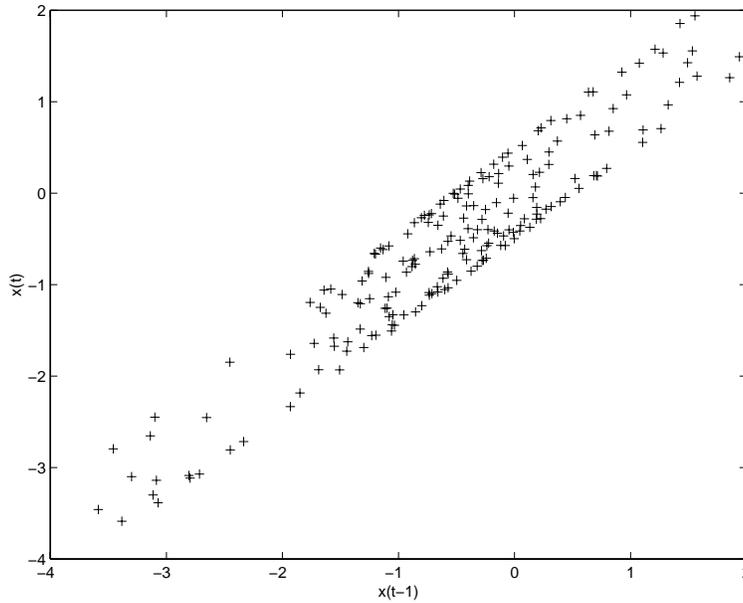


Figure 4. Scatter diagram of series *CH95*.

As said above, in order to extract from the one dimensional observed data  $\{x_t\}$ , the dynamic properties, especially the value of the largest

Lyapunov exponent of the original model (27), only the function

$$\Psi_1(x_t, x_{t-1}, \dots, x_{t-m+1}) = x_{t+1}$$

should be approximated by a neural network. This implies a choice for the value of  $m$ , or in neural network terms, the size of the input layer. Since the original system has dimension 2, based on Takens embedding theorem, it will be (more than) sufficient to take as neural network input variables  $(x_t, x_{t-1}, \dots, x_{t-5})$ ; adding an additional constant, the dimension of the input layer will be 6.

The initial number of hidden layers will be 5, while the output layer has only one cell, the target value being  $x_{t+1}$ . Before processing the data through the neural network, the data are scaled down to a range of  $[0.1, 0.9]$ . Linear scaling do not affect the value of the Lyapunov exponents. Initial parameter values are randomly chosen from  $[-0.5, 0.5]$ .

To summarize the performance of this network, the quantities

$$R^2 = \frac{(\hat{y}'y)^2}{(y'y)(\hat{y}'\hat{y})} \quad (31)$$

$$MSSR = \frac{1}{T}(y - \hat{y})'(y - \hat{y}) \quad (32)$$

$$SIC = \ln(MSSR) + \frac{n_p}{2T} \ln(T), \quad (33)$$

are calculated. In table (I) the results for the  $nn(6, 5, 1)$  are reported<sup>1</sup>.

Table I. Results of  $nn(6, 5, 1)$

$R^2$	$MSSR$	$SIC$
1.00	$1.4 \cdot 10^{-9}$	-9.70

In table (II) the incremental contributions of the hidden layer nodes are given; both  $R^2$  and principal component vector (row with label PrincComp in table (II)) indicate that two hidden layer nodes can be removed.

The incremental contributions of inputs are shown in table (III); the inputs  $x_{t-4}, x_{t-3}, x_{t-2}$  should be removed.

Applying node removal, the network is reduced to two inputs plus constant and three hidden layer nodes (plus constant). This  $nn(3, 3, 1)$  performs as well as the larger network; see table (IV).

<sup>1</sup> All values reported are rounded-off at the last reported digit.

Table II. Contribution of hidden layer nodes

Hidden cell	1	2	3	4	5
$R_{incr}^2$	0.000	0.000	0.517	0.880	0.940
PrincComp.	-0.000	-0.000	-0.081	-0.733	0.675

Table III. Contribution of input layer nodes

Input cell	$x_{t-4}$	$x_{t-3}$	$x_{t-2}$	$x_{t-1}$	$x_t$
$R_{incr}^2$	0.000	0.000	0.000	0.124	0.241
PrincComp.	0.000	0.000	-0.000	0.613	0.790

Table IV. Results of  $nn(3, 3, 1)$  and  $nn(3, 2, 1)$ 

Network	$R^2$	$MSSR$	$SIC$
$nn(3, 3, 1)$	1.00	$1.5 \cdot 10^{-9}$	-10.04
$nn(3, 2, 1)$	1.00	$6.3 \cdot 10^{-9}$	-9.31

Table V. Contribution of hidden layer nodes in  $nn(3, 3, 1)$  network

Hidden cell	1	2	3
$R_{incr}^2$	0.696	0.890	0.943
PrincComp.	0.114	-0.745	0.657

Both input nodes do have the same contributions; no further reduction at this level is applied.

The incremental contributions of hidden layer nodes is shown in table (V). Based on the principal component vector (with weight 99%) hidden node 1 could be removed; see again table (IV) for the results on this network. The performance is just slightly worse compared to the larger network. No further reduction is applied. So we end up with a network of two inputs  $x_{t-1}, x_t$  (plus constant) and two hidden layer nodes.

Based on this  $nn(3, 2, 1)$  network, the Lyapunov exponents of  $\Psi$  are calculated. This can be done on two ways: either along the actual data  $(x_t, x_{t-1})$ , or along a series  $(\hat{x}_{t-1}, \hat{x}_t)$ , where  $\hat{x}_t$  is a series generated by the neural network function  $nn(3, 2, 1)$ :

$$\hat{x}_{t+1} = nn(3, 2, 1)(\hat{x}_{t-1}, \hat{x}_t) \quad (34)$$

The series  $\hat{x}_t$  is the dynamic forecast given some initial values  $\hat{x}_0 = x_0$ ,  $\hat{x}_1 = x_1^2$ ; here and in the following, such a series will be denoted as *orbit* in contrast to the actual data series  $\{x_t\}$ .

If the function  $\Psi$  is indeed a proper approximation of the original model then one should expect that the dynamic properties along the actual data and along the orbit data should be similar.

Table VI. Lyapunov exponents  $\gamma = 4$

series	actual $x_t$	orbit $\hat{x}_t$
Lyapunov exponent	0.9951	1.0155
Lyapunov exponent	-0.0735	-0.0729

The results for the Lyapunov exponents are given in table (VI); they are in both cases near the theoretical values. Note that for the orbit data the largest Lyapunov exponent is greater than 1; this would correspond in the original model (27) with a coefficient of  $\epsilon_t(1-\epsilon_t)$  larger than 4: for almost all initial values, the series  $\epsilon_t$  would diverge. However the orbit data  $\hat{x}_t$  converge to a large amplitude periodic pattern: in figure (5) the graph of  $(t, \hat{x}_t)$  for the  $t = 1, \dots, 150$  (left panel in figure (5)), and for  $t = 1, \dots, 300$  (right panel in figure (5)) is compared to the graph of the actual data  $(t, x_t)$ . Since the original system is chaotic, one should not expect that both series, actual and orbit data, fall together but one should that the graph of both series show a similar pattern; even in this case (and also in the larger networks get before) the orbit trajectory finally deviates essentially from the original pattern; see figure (5). Although initially the orbit data stay in the range  $[0.1, 0.9]$  of the original data, see left panel of figure (5), the orbit data converges to a large amplitude ( $\sim 50$ ) periodic pattern, see the right panel of the same figure.

The reason for the deviations of orbit data from the original pattern is to be found in the structural instability of the system (27) with  $\gamma = 4$ . If  $\gamma = 3.95$  then still a chaotic series will be generated however the system it self is structural stable. Approximating those data by a neural network, a network similar in size as before is found. In figure (6) again actual and orbit (even extended in time beyond the range of the original data) is shown. Now the *orbit* data, the dynamical forecast of given value  $x_0$ , "behaves" like the original data. The same holds for the Lyapunov exponents; see table (VII). Note that, for  $\gamma = 3.95$ , no analytic value of the largest Lyapunov exponent is available. Analytical

<sup>2</sup> The initial values are taken from the actual data.

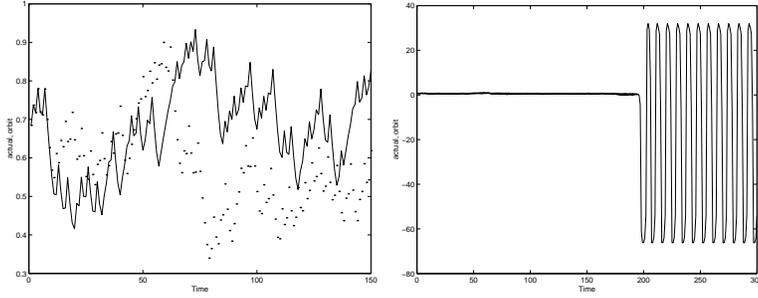


Figure 5. Actual (scaled) data *CH95*,  $\gamma = 4$  and orbit data (continuous line) generated by neural network  $nn(3, 2, 1)$ . Left panel: time index from 1 to 150; right panel: time index from 1 to 300

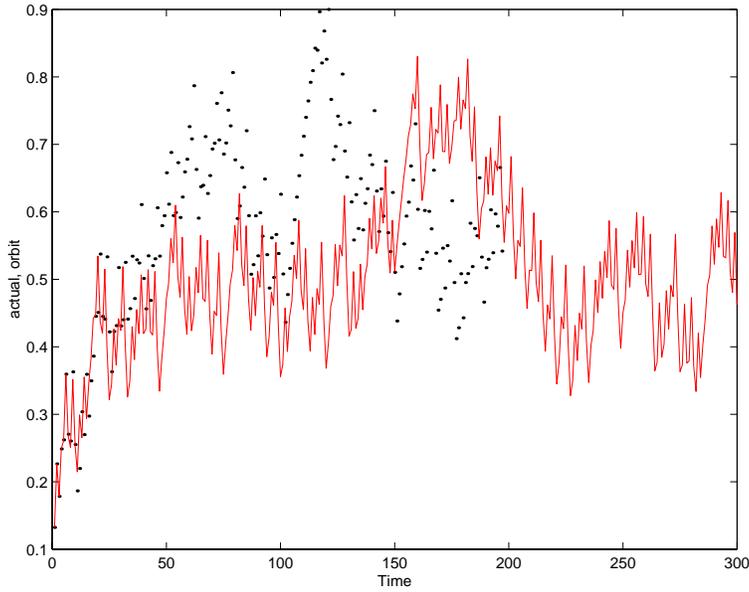


Figure 6. Actual (scaled) data with  $\gamma = 3.95$  and orbit data (continuous line) generated by neural network  $nn(3, 2, 1)$

Table VII. Lyapunov exponents  $\gamma = 3.95$

series	actual $x_t$	orbit $\hat{x}_t$
Lyapunov exponent	0.8618	0.8614
Lyapunov exponent	-0.0782	-0.0727

values of Lyapunov exponents can be calculated if the data generating process is ergodic and if the space-distribution of the data is known; see for more details, Arnold and Avez (1988). For the process  $\epsilon_{t+1} = 3.95\epsilon_t(1 - \epsilon_t)$  no analytical expression is known for the distribution of the data  $\epsilon_t$ . The second Lyapunov exponent will still be  $\sim -0.074$ .

Finally, we look how the network  $nn(3, 2, 1)$  has approximated the original data. For both cases,  $\gamma = 4$ ,  $\gamma = 3.95$ , none of the parameters  $A, b, C$  and  $d$ , are very large. For instance in the case of  $\gamma = 4$ , the input vector of hidden nodes  $xA + b$ , is given as:

$$\begin{aligned} (xA + b)_1 &= -3.1557x_{t-1} + 3.3197x_t - 1.3688 \\ &= 3.3197(-0.9506x_{t-1} + x_t - 0.4123) \\ (xA + b)_2 &= -0.7453x_{t-1} + 0.8095x_t + 0.0516 \\ &= 0.8095(-0.9207x_{t-1} + x_t + 0.0637) \end{aligned} \tag{35}$$

Note that reported parameter values are estimation results using scaled data.

### 3.2. NONLINEAR TRENDS IN REAL EXCHANGE RATES

The economic time series are monthly observations of the natural logarithm of real exchange rates. We report those between yen and dollar (period January 1957 to March 1998). This series is denoted by *JPUS*, see figure (7). Since the original data process is unknown, a proper embedding dimension  $m$ , e.g. delay vector  $(x_t, \dots, x_{t-m+1})$ , is also unknown. One way out is to extract from the correlation dimension the embedding dimension; see Grassberger and Procaccia (1983) and also Kaashoek and van Dijk (1991).

Another approach would be to start with a rather large network and prune this network till further reduction will corrupt the performance essentially. In this case, the initial network was taken to be  $nn(6, 10, 1)$  with input variables  $(1, x_t, x_{t-1}, \dots, x_{t-4})$ . The performance of this network, and the successively reduced networks, are summarized in table (VIII). At the same time, in the column " $\lambda$ " the largest Lyapunov exponent along the actual data set is reported while in column " $\hat{\lambda}$ " the largest Lyapunov exponent along the *orbit* is reported. The applied reduction can be found in the column "Pruning".

The input variables of the resulting network  $nn(2, 3, 1)$  are  $\{(1, x_t)\}$ . In figure (8) the *orbit* based on the  $nn(2, 3, 1)$  network is shown (the data are scaled down to the range  $[0.1, 0.9]$ ): the orbit follows nicely



Figure 7. Time series *JPUS*: Yen-Dollar exchange rates.

Table VIII. Results of neural network approximation of *JPUS* data

Network	$R^2$	$MSSR$	$SIC$	$\lambda$	$\hat{\lambda}$	Pruning
$nn(6, 10, 1)$	0.997	$0.16 \cdot 10^{-3}$	-3.880	0.058	-0.013	3 redundant hidden cells
$nn(6, 7, 1)$	0.997	$0.16 \cdot 10^{-3}$	-4.041	0.033	-0.038	2 redundant hidden cells
$nn(6, 5, 1)$	0.997	$0.16 \cdot 10^{-3}$	-4.130	0.048	-0.143	2 redundant input cells
$nn(4, 5, 1)$	0.997	$0.16 \cdot 10^{-3}$	-4.194	0.048	-0.032	2 redundant hidden cells
$nn(4, 3, 1)$	0.996	$0.18 \cdot 10^{-3}$	-4.188	0.076	-0.034	2 redundant input cells
$nn(2, 3, 1)$	0.996	$0.19 \cdot 10^{-3}$	-4.215	-0.011	-0.019	

the pattern of the actual data converging to a scaled value of 0.26 compatible with the unscaled value of  $-0.74$ .

In all cases the orbit is stable (negative largest Lyapunov exponent) while along the actual data, the Lyapunov exponent is positive indicating an unstable series except for final the  $nn(2, 3, 1)$  network. The differences between the networks with respect to statistics are marginal. Note also that the Lyapunov exponent based on actual data still encompass stochastic elements if present in the data itself. The smallest network is preferable.

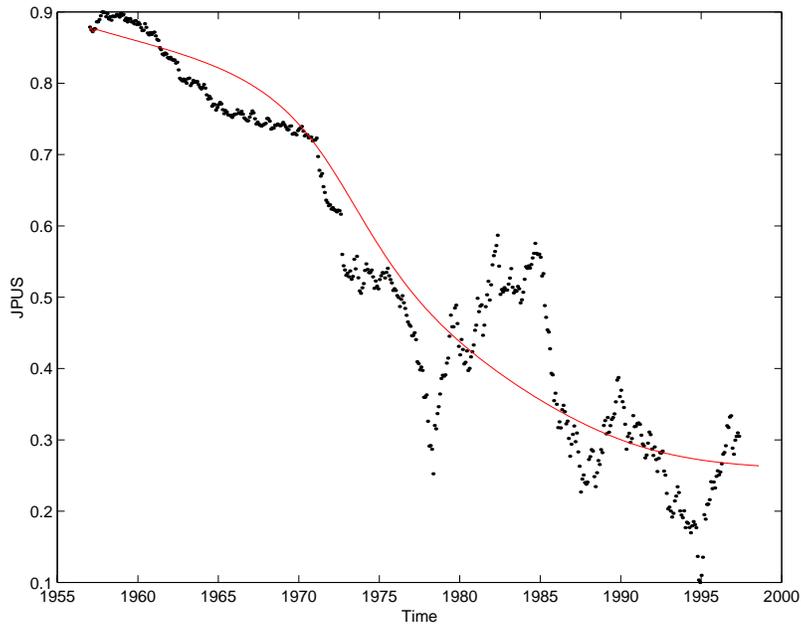


Figure 8.  $nn(2, 3, 1)$  orbit compared to actual (scaled) JPUS data

Our empirical analysis indicates that nonlinear trends may become an important part of a modelling strategy. So far, the empirical literature on real exchange rate analysis makes mostly use of autoregressive models with possible unit root behaviour, see e.g., Schotman and van Dijk (1991) and the references cited there, in particular, Dornbusch (1976), Frankel (1979) and Meese and Rogoff (1988).

The issue in that literature is whether the hypothesis of Purchasing Power Parity (*PPP*) holds. Non-rejection of a unit root has lead researchers to conclude that *PPP* does not hold. The results presented in this paper indicate that the *PPP* hypothesis should be investigated in a nonlinear model.

Our empirical analysis may also be used to verify whether the long run equilibrium values of several exchange rates of countries of the European Monetary Union correspond to the values set by the European Central Bank in January 1999. For a more detailed analysis on nonlinear trends in real exchange rates of several industrialized countries using neural networks we refer to Kaashoek and van Dijk (1999).

We note that in the present paper our interest is in an analysis of the level of the exchange rates. When one is interested in the return of exchange rates, one may perform a similar descriptive analysis on first differences. This is a topic for further research.

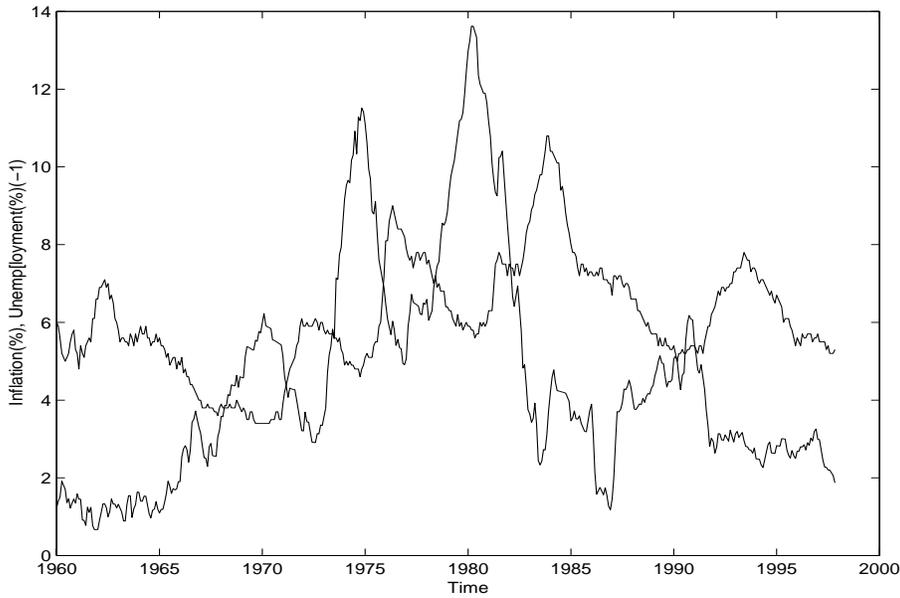


Figure 9. Time series of inflation rates  $INFR12$  and unemployment rates  $LHUR(-1)$

#### 4. Phillips curve

The data are monthly US unemployment rates (all workers, 16 years and older), denoted by  $LHUR$ , and monthly 12-period inflation rates defined by  $100 \ln(p_t/p_{t-12})$  in the level of the consumer price index  $p_t$ ; those data are denoted by  $INFR12$ . The unemployment rates and price indices data start at 1960 and end at November 1997.

The Phillips curve relates unemployment rates with inflation rates; a common approach, see e.g. Sargent (1999), is to link unemployment of one year before with current inflation. In figure (9) the time series of  $LHUR(-1)$ <sup>3</sup> and of  $INFR12$  are shown.

The Phillips curve data  $\{(LHUR(-1)(t), INFR12(t))\}$  are shown in figure (10).

Two attempts are made to model the relation between  $LHUR(-1)$  and  $INFR12$ .

First: Let  $nn(2, 6, 1)$  be the neural network with inputs a constant term and the variable  $LHUR(-1)$ , consider 6 hidden layer cells and let the

<sup>3</sup> Here, and in the following, 1 year delayed data are denoted by a  $-1$  argument.

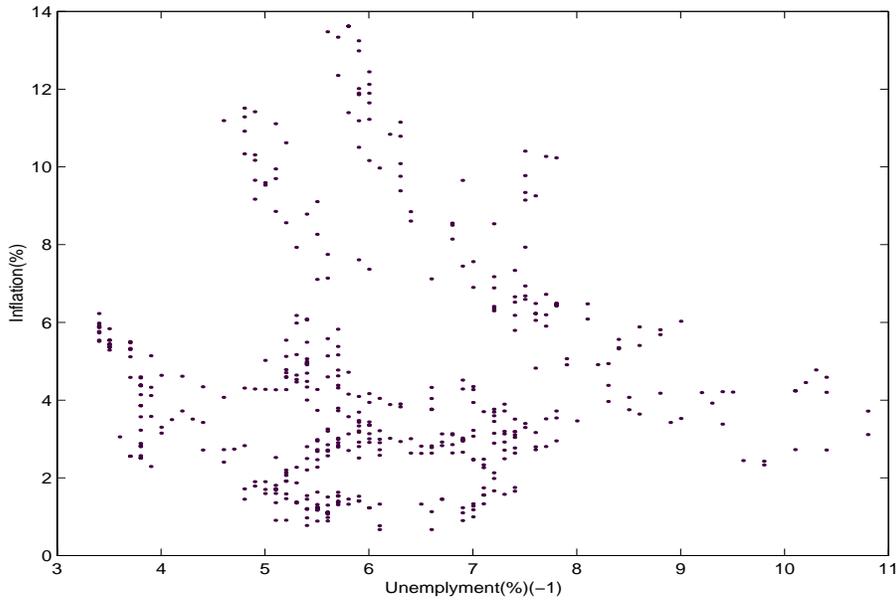


Figure 10. Phillips curve data  $\{(LHUR(-1), INFR12)\}$

target output value be  $INFR12$ . The performance of this network, which is to fit the Phillips curve to the data of figure (10), is poor:  $MUSSR = 0.13$ ,  $R^2 = 0.11$ . This is rather obvious because with input variable  $LHUR(-1)$ , the points of figure (10) can hardly be considered as generated by a single valued relation (function). The graph of the neural network function  $x \rightarrow nn(2, 6, 1)(x)$  confirms this: it seems to consist of four descending functions (all four being standard Phillips curves) with smooth transitions in between; see figure (11). Networks with more hidden layers show similar patterns. Although a neural network is capable of generating step-functions, it can not of course model "multi-level relations". The graph in figure (10) is rather to be considered as generated by some explicit time dependent relation  $(t, LHUR(-1)) \rightarrow INFR12$ .

Second attempt:

Referring again to figure (11), a time varying approach is tempting as in time varying smooth transition models, see e.g. Van Dijk (1999).

In this section, we will add an additional argument to the notation of a neural network, either  $(x)$  or  $(t)$  depending whether the input variables include explicitly data  $x$  or time-indices  $t$ .

Suppose 4 time periods, and for each time period a neural network

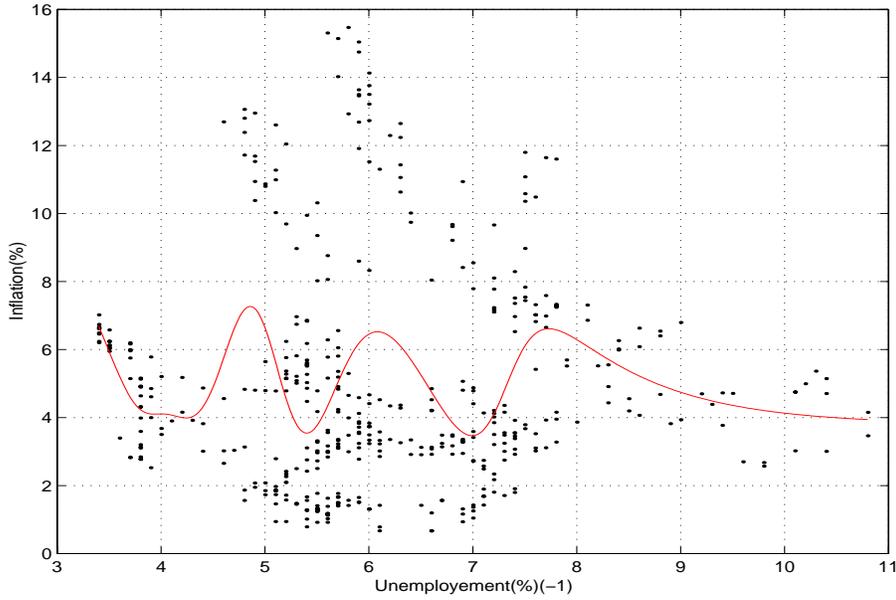


Figure 11. Graph of neural network function  $nn(2, 6, 1)(x)$  and actual data

approximation (of unknown size) written as  $nn_i(x), i = 1, \dots, 4$  with

$$nn_i(x) = c_i g(a_i x + b_i) + d_i, \quad \forall \quad i = 1, \dots, 4. \quad (36)$$

then a formulation of time varying smooth transition model could be:

$$nn_1(x)g_1(t) + nn_2(x)g_2(t) + nn_3(x)g_3(t) + nn_4g_4(t) \quad (37)$$

subject to some normalization, say:

$$g_1(t) + g_2(t) + g_3(t) + g_4(t) = \gamma, \quad \forall t. \quad (38)$$

Hence equation (37) can be written as:

$$nn_1(x)(\gamma - g_2(t) - g_3(t) - g_4(t)) + nn_2(x)g_2(t) + nn_3(x)g_3(t) + nn_4g_4(t). \quad (39)$$

Collecting the transition functions, one gets:

$$\gamma nn_1(x) + g_2(t)(nn_2(x) - nn_1(x)) + g_3(t)(nn_3(x) - nn_1(x)) + g_4(t)(nn_4(x) - nn_1(x)). \quad (40)$$

Now assume:

$$nn_i(x) = (1 + \gamma)nn_1(x), \quad i = 2, \dots, 4 \quad (41)$$

then the model equation can be written as:

$$\gamma\{1 + g_2(t) + g_3(t) + g_4(t)\}nn_1(x) \quad (42)$$

Note that the condition (41) assumes that for all four regimes, the neural network approximation differs only by a multiplicative constant. Assuming

$$g_i(t) = c_i / (1 + \exp(-a_i t - b_i)), \quad (43)$$

then in full neural network notation, the formulation of equation (42) is:

$$nn(2, H_t, 1)(t) \times nn(I, H, 1)(x). \quad (44)$$

Assuming 4 time transitions ( $H_t = 3$ ), our neural network model is given by:

$$(t, x) \rightarrow nn(2, 3, 1)(t) \times nn(I, H, 1)(x) \quad (45)$$

with

$$nn(2, 3, 1)(t) : t \rightarrow 1 + \sum_{i=1}^3 \frac{c_i}{1 + e^{-a_i t - b_i}} \quad (46)$$

$$nn(I, H, 1)(x) : x \rightarrow \delta + \sum_{i=1}^H \frac{\gamma_i}{1 + e^{-\alpha_i x - \beta_i}}. \quad (47)$$

The  $nn(2, 3, 1)(t)$  will be denoted as the  $t$ -network; as the size of this network is fixed, we will left out from the notation the size-arguments, and write just  $nn(t)$ . The function  $nn(I, H, 1)(x)$  will be called the  $x$ -network; like the  $t$ -network, the  $x$ -network is denoted as  $nn(x)$ . However, in this case we shall explicitly mention the size of this network, especially the value of  $H$ .

Hence, instead of equation (44), we write in short:

$$nn(t) \times nn(x). \quad (48)$$

The input variable  $x$  will be (again) the data series  $LHUR(-1)$ , hence the  $x$ -network has  $I = 2$ ; the input data  $t$  will be a time-index series  $\{1, 2, \dots\}$ . As before,  $x$  data are scaled down to  $[0.1, 0.9]$ . However, for convenience, in graphs the data are scaled back to their original range. The number of hidden layer cells  $H$  in the  $x$ -network  $nn(x)$  has to be defined. We report on the results for  $H = 3$  and  $H = 1$ . Networks with more hidden layer cells didn't give other results in the sense that

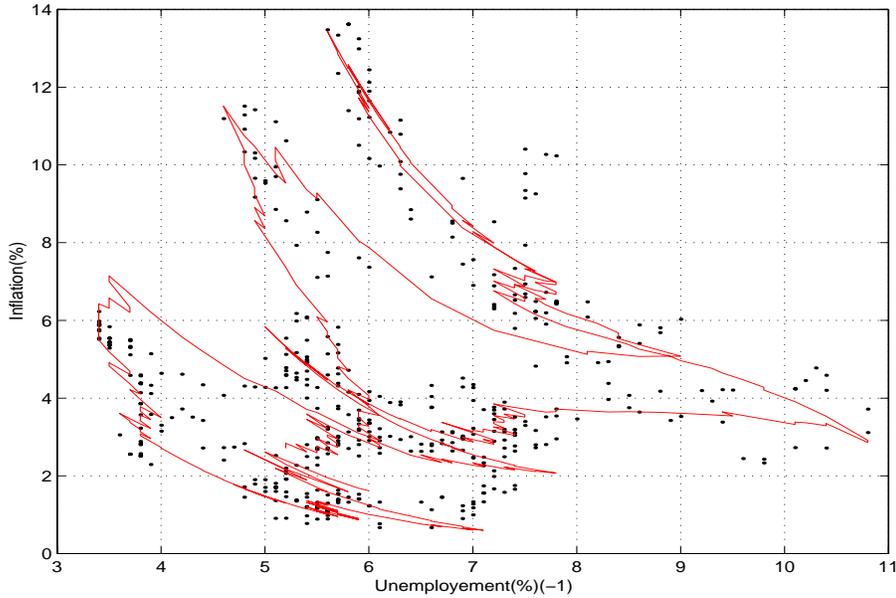


Figure 12. Estimated data of model  $nn(t) \times nn(x)$ , with  $H = 3$ , and actual data (dots)

the neural networks generate outputs similar as the one depicted in figure (12); additional hidden layer cells has a low incremental contribution.

Results on  $H = 3$ .

Statistical values:  $MUSSR = 0.002$ ,  $R^2 = 0.96$ .

In figure (12) the estimated- and actual data are shown.

The performance is much better (as expected) then the foregoing network approximation.

In order to find out how the time-network performs and whether an elementary "Phillips-curve" is found by this model, the time series outputs of the  $t$ -network  $nn(t)$  and  $x$ -network  $nn(x)$  are graphed separately; see figure (13)<sup>4</sup>.

It seems that the  $x$ -network has indeed found some basic Phillips-curve structure. However, the  $t$ -network shows only three levels while from figure (11) four levels may be expected. So, one transition is missing in the  $t$ -network. Looking at the output of each hidden layer cell of the  $t$ -network  $nn(t)$  separately reveals the same: hidden cells 1 and 2

<sup>4</sup> All data in the figures are on the same scale: all data are scaled back to the original range.

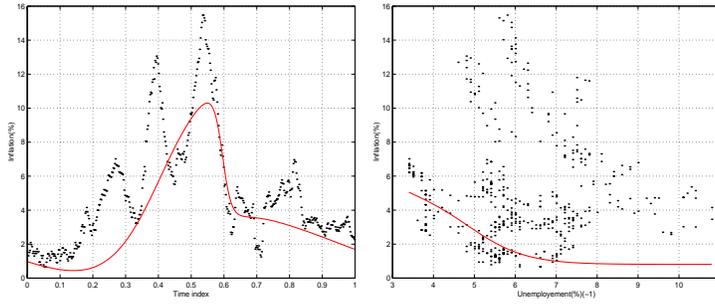


Figure 13. Actual data  $INFR12$  (dots) compared to output of  $t$ -network  $nn(t)$  (left) and  $x$ -network  $nn(x)$  (case  $H = 3$ ) (right)

will generate 3 levels while hidden cell 3 is almost linear in time; see figure (14) (the almost flat zero line in the figures is the graph of actual inflation rate data  $INFR12$ ).

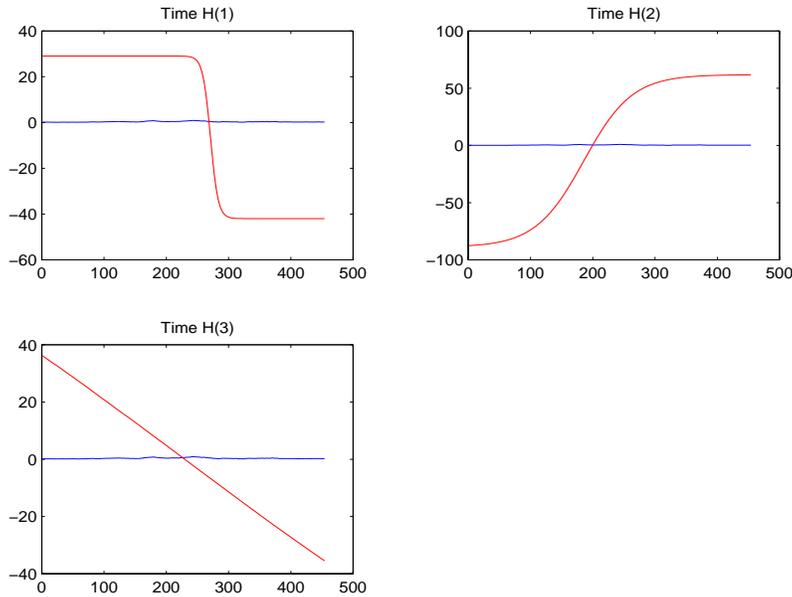


Figure 14. Output of hidden layer cells of  $t$ -network  $nn(t)$  in case of the  $x$ -network with  $H = 3$

Examining the  $x$ -network  $nn(x)$  reveals that this network has a level transition itself; such a level transition is made up by two hidden cells with almost equal but reverse in sign output level. So, a  $x$ -network with only one hidden cell ( $H = 1$ ) is tried out. In that case, level-transitions if found by the combined network  $nn(t) \times nn(x)$ , may only be found in

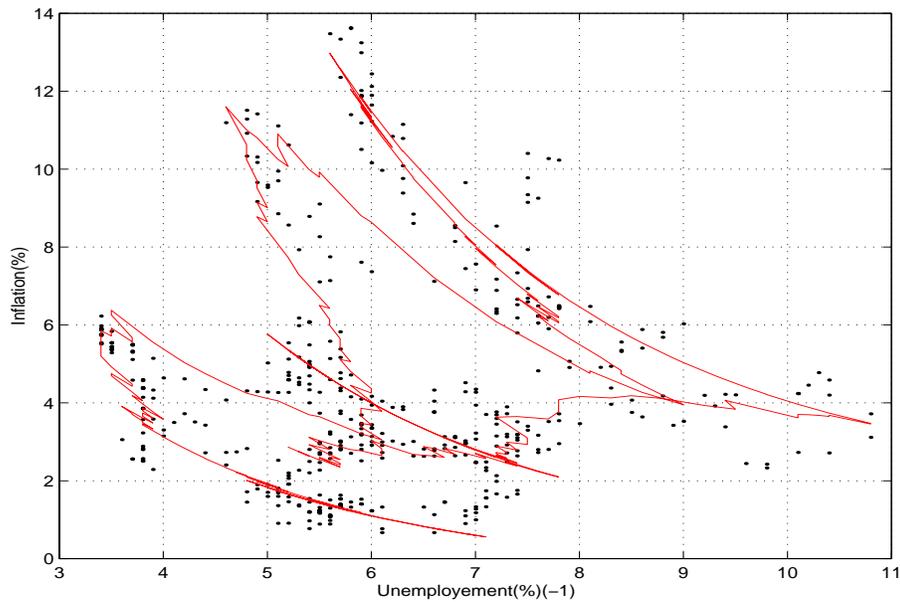


Figure 15. Estimated data of model  $nn(t) \times nn(x)$ , with  $H = 1$ , and actual data  $INFR12$

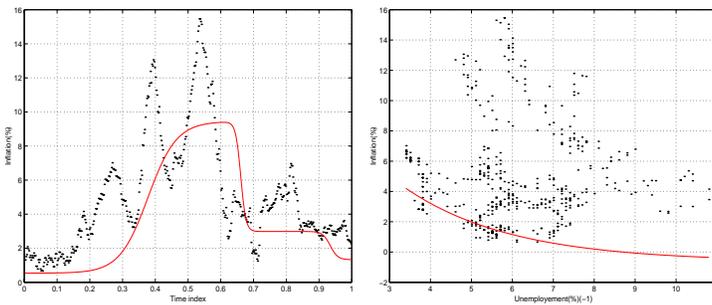


Figure 16. Output of  $nn(t)$  (left) and  $nn(x)$  (case  $H = 1$ ) (right) compared to actual data  $INFR12$

the  $t$ -network.

Results on  $H = 1$ .

Statistical values:  $MUSSR = 0.0023$ ,  $R^2 = 0.93$ .

In figure (15) the estimated- and actual data  $INFR12$  are shown.

The output of the  $t$ -network  $nn(t)$  and  $x$ -network  $nn(x)$  show the three transitions and in case of the  $x$ -network, a smooth "Phillips-curve"; see figure (16).

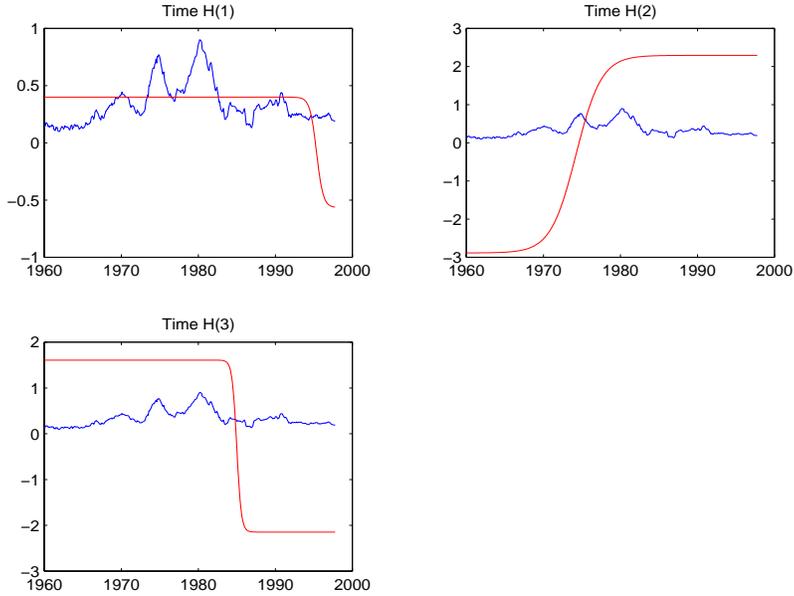


Figure 17. Output of hidden layer cells of  $nn(t)$  (case  $x$ -network with  $H = 1$ )

It seems that the  $x$ -network has indeed found (again) some basic Phillips-curve structure and now the time-network  $nn(t)$  generates indeed four levels. Approximately, those time transitions occur where the input to a hidden cell will be zero, or otherwise stated, in the point of symmetry of the logistic function. In the case of the  $t$ -network, this will be at  $t_i = -b_i/a_i$ , see equation (46). In this case the transitions take place at:

$$\begin{aligned}
 t_1 &= 171.93 \sim \text{April 1974} \\
 t_2 &= 300.81 \sim \text{February 1982} \\
 t_3 &= 425.13 \sim \text{June 1995}
 \end{aligned} \tag{49}$$

The date  $t_1$  corresponds more or less to the first oil crises, date  $t_2$  corresponds to a business cycle slowdown in the US economy while the third date  $t_3$  coincides with the beginning of a period of low inflation and low unemployment. Looking at the output of each hidden layer cell of the  $t$ -network  $nn(t)$  separately reveals the same; see figure (17).

We repeat that our method is descriptive. For a statistical approach, which enables one to compute confidence intervals around these dates, we refer to White (2000).

We end this section with a similar remark as made at the end of section 3 on nonlinear trends in real exchange rates. That is, our empirical analysis on the Phillips curve indicates that the unemployment-inflation

trade-off is shifting over time. We have also presented an approximation of the dates of these transitions. It is of considerable interest to find an economic explanation for these time transitions. This is a topic which is, however, beyond our exploratory data analysis.

## 5. Conclusion

In this paper we gave a brief exposition of neural networks and their flexibility in handling complex patterns in economic data. A descriptive method to prune the size of neural nets in order to avoid overfitting is summarized. It is shown how a neural network is used to recover the dynamic properties of a nonlinear system, in particular, its stability by making use of the Lyapunov exponent. A two-stage network has been introduced where the usual nonlinear model is combined with time transitions, which may be handled by neural networks. The empirical examples on nonlinear trends in real exchange rates and a time-varying Philips curve using US data indicate the applicability of the proposed procedures. Further research is needed to allow for more than one output and it is a challenge for neural network analysis to recover common nonlinear trends in multivariate nonlinear systems.

## Acknowledgements

The authors are indebted to Lennart Hoogerheide, Rutger van Oest and Daan Ooms for helpful assistance.

## References

- Arnold, V.I. and Avez A., 1988, *Ergodic Problems of Classical Mechanics* (Addison-Wesley Publishing Company, INC., Menlo Park, CA.).
- Bishop, C.M., 1995, *Neural Networks for Pattern Recognition* (Clarendon Press, Oxford).
- Cybenko, G., 1989, Approximation by superpositions of a sigmoidal function, *Mathematics of Control, Signals and Systems*, Vol. 2.
- Dornbusch, R., 1976, Expectations and exchange rate dynamics, *Journal of Political Economy* 84, 1161-1176.
- Eckmann, J.P. & Ruelle, D., 1985, Ergodic theory of chaos and strange attractors, *Reviews of Modern Physics* 57, 617-656.
- Frankel, J.A., 1979, On the mark: A theory of floating exchange rates based on real interest differentials, *American Economic Review* 69, 610-622.

- Funahashi, K., 1989, On the approximate realization of continuous mappings by neural networks, *Neural Networks*, Vol. 2.
- Gallant, A.R. & H. White, 1989, There exists a neural network that does not make avoidable mistakes, in *Proc. of the International Conference on Neural Networks*, San Diego, 1988 (IEEE Press, New York).
- Gallant, A.R. & H. White, 1992, On learning the derivatives of an unknown mapping with multilayer feedforward networks, *Neural Networks*, Vol. 5.
- Granger, C.W.J. & T. Teräsvirta, 1993, *Modelling Nonlinear Economic Relationships* (Oxford University Press Inc., New York).
- Grassberger, P. & I. Procaccia, 1983, Measuring the strangeness of strange attractors, *Physica 9D*, 189-208.
- Guckenheimer, J. and Holmes, P., 1983, *Nonlinear Oscillations, Dynamical Systems, and Bifurcations of Vector Fields* (Springer-Verlag, New York Berlin Heidelberg Tokyo).
- Hecht-Nielsen, R., 1987, Kolmogorov mapping neural network existence theorem, in *Proc. IEEE First International Conference on Neural Networks*, 11-13.
- Hecht-Nielsen, R., 1989, Theory of the Backpropagation Neural Network, in *Proc. of International Joint Conference on Neural Networks*, 593-605.
- Hecht-Nielsen, R., 1990, *Neurocomputing* (Addison-Wesley Publ. Co., Menlo Park, CA).
- Hertz, J., A. Krogh & R.G. Palmer, 1991, *Introduction to the theory of neural computation* (Addison-Wesley Publishing Company, Reading Massachusetts).
- Hornik, K., Stinchcombe, M., and White, H., 1989, Multilayer feedforward networks are universal approximators, *Neural Networks*, Vol. 2.
- Hornik, K., Stinchcombe, M., and White, H., 1990, Universal Approximation of an Unknown Mapping and its Derivatives Using Multilayer Feedforward Networks, *Neural Networks*, Vol. 3.
- Kaashoek, J.F. & H.K. van Dijk, 1991, A note on the detection of chaos in medium sized time series, *International Series of Numerical Mathematics*, Vol. 97 (Birkhäuser Verlag Basel).
- Kaashoek, J.F. & H.K. van Dijk, 1994, Evaluation and Application of numerical procedures to calculate Lyapunov exponents, *Econometric Reviews*, special issue, Vol. 13, No. 1.
- Kaashoek, J.F. & H.K. van Dijk, 1998, A simple strategy to prune neural networks with an application to economic time series, Report 9854/A, *Econometric Institute Erasmus University Rotterdam*.
- Kaashoek, J.F. & H.K. van Dijk, 1999, Neural network analysis of varying trends in real exchange rates, Report EI9915/A, *Econometric Institute Erasmus University Rotterdam*.
- Kolmogorov, A.N., 1957, On the representation of continuous functions of many variables by superposition of continuous functions of one variable and addition, *American Mathematical Monthly Translation*, Vol. 28. (Russian original in *Doklady Akademii Nauk SSSR*, 144.)
- Leshno, M., Lin, V. Y., Pinkus, A. & Schocken, S., 1993, Multilayer Feedforward Networks With a Nonpolynomial Activation Function Can Approximate Any Function, *Neural networks*, Vol. 6.
- Malinvaud, E., 1970, *Statistical Methods of Econometrics* (North-Holland Publ. Co., Amsterdam, London).
- Meese, R.A. and K. Rogoff, 1988, Was it real? The exchange rate-interest differential relation over the modern floating rate period, *Journal of Finance* 43, 933-948.

- Mozer, M.C. & P. Smolensky, 1989, Skeletonization: a technique for trimming the fat from a network via relevance assessment, in D.S. Touretzky, ed., *Advances in Neural Information Processing Systems*, Vol. 1 (San Mateo, CA.).
- Press, W.H., B.P. Flannery, S.A. Teukolsky & W.T. Vetterling, 1988, *Numerical Recipes* (Cambridge University Press, Cambridge).
- Rumelhart, D.E., Hinton, G.E., & Williams, R.J., 1986, Learning representations by error propagation, in D.E. Rumelhart, J.L. McClelland and the PDP research Group, eds., *Parallel distributed processing*, Vol. 1 (Cambridge, MA, MIT Press).
- Sargent, T.J., 1999, *The Conquest of American Inflation* (Princeton University Press, Princeton, NJ).
- Schotman, P. & H.K. van Dijk, 1991, A Bayesian Analysis of the unit root in real exchange rates, *Journal of Econometrics*, 49, 195-238.
- Simpson, P.K., 1990, *Artificial neural systems: foundations, paradigms, applications and implementations* (Pergamon Press).
- Takens, F., 1981, Detecting strange attractors in turbulence, in D.A. Rand and L.S. Young, eds., *Dynamical systems and turbulence* (Springer-Verlag, Berlin).
- Theil, H., 1971, *Principle of Econometrics* (Wiley & Sons).
- Van Dijk, D., 1999, *Smooth Transition Models: Extensions and Outlier Robust Inference*, Tinbergen Institute Research Series, No. 200 (Erasmus University Rotterdam).
- White, H., 1989, Some Asymptotic Results for Learning on Single Hidden Layer Feedforward Network Models, *Journal of the American Statistical Association*, Vol. 84, No. 408.
- White, H., A reality check for data snooping *Econometrica*, vol. **68**, no.5, 1097-1127, 2000.